

SN12(X)/15/17/20/25PT

Three Phase PV Inverter/2 MPPTs

Safe & Reliable

IP66 protection & C5 anti-corrosion rating
Type II SPD, both DC & AC sides
Built-in arc-fault circuit-interrupter

High-Performance Management

Accurate string current detection
Support export power limit
Local & remote maintenance

High Yield


Max. efficiency up to 98.5%
Compatible with bifacial PV modules
1.1 times continuous output overload

User-Friendly Design

Fanless design for quiet operation
Optional OLED screen
Quickly set up smart monitoring via APP



Circuit Diagram

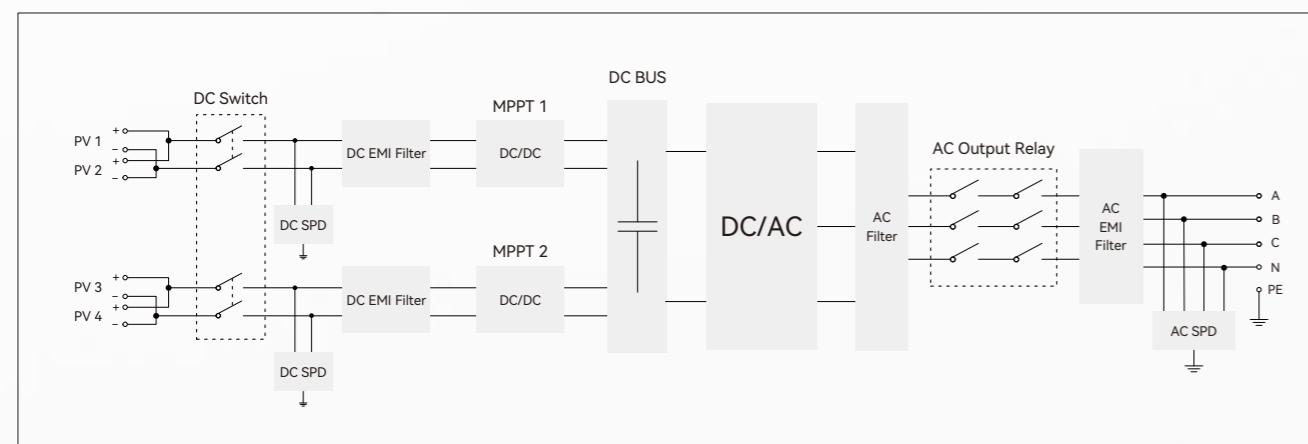

Model	SN12PT-X	SN15PT	SN17PT	SN20PT	SN25PT
Input (PV)					
Max. PV input voltage		1100V			
Recommended max. PV power (STC)	18kWp	22.5kWp	25kWp	30kWp	37.5Wp
Nominal PV input voltage		620V			
MPPT operating voltage range		140V~1000V			
Full power MPPT voltage range	375V~850V	470V~850V	470V~850V	470V~850V	470~850V
Startup PV voltage		180V			
Number of PV inputs	3 (2 MPPTs, 2/1)	3 (2 MPPTs, 2/1)	4 (2 MPPTs, 2/2)	4 (2 MPPTs, 2/2)	4 (2 MPPTs, 2/2)
Max. current per MPPT	32A/20A	32A/20A	32A/32A	32A/32A	40A/32A
Max. short circuit current per MPPT	50A/25A	50A/25A	50A/50A	50A/50A	50A/50A
Output (grid)					
Nominal output power	12kW	15kW	17kW	20kW	25kW
Max. output apparent power	13.2kVA	16.5kVA	18.7kVA	22kVA	27.5kVA
Max. output current	19.1A	23.9A	27.1A	31.9A	39.9A
Nominal grid voltage		3L/N/PE, 230V/400V			
Grid voltage range		320V~480V (According to local standards)			
Nominal grid frequency		50/60Hz			
Power factor range		0.8leading~0.8lagging			
Harmonic (THD)		<3%			
Efficiency					
Max. efficiency		98.50%			
EU efficiency		98.10%			
General data					
Display mode		LED, OLED(optional)			
Communication port		RS485,WIFI/4G/Ethernet			
Weight	23kg	23kg	24kg	25kg	25kg
Dimensions (W*H*D)		580*430*270mm			
Max. operating altitude		4000m(>3000m derating)			
Cooling method		Natural			
Humidity		0~100%			
Operating temperature		-25~60°C			
Protection level		IP66			
Topology		Transformerless			
Self-consumption at night		< 1W			
Protection					
Leakage current protection		Yes			
Anti-island protection		Yes			
DC reverse protection		Yes			
AC short circuit protection		Yes			
PV string current detection		Yes			
PID recovery		Optional			
DC switch		Yes			
Arc-fault circuit-interrupter		Yes			
Surge protection		DC II/AC II			
Insulation monitoring		Yes			
Over-voltage protection		AC III/ DC II			

IEC 62109-1/2, IEC61000-6, IEC62116, IEC61727, IEC61683, IEC60068, IEC61000-3, EN50549-1, VDE4105, C10/11, CEI-0-21, PTPiREE, ORDINANCE No.140

© 2023 Sineng Electric Co., Ltd. All rights reserved. Subject to change without notice.